
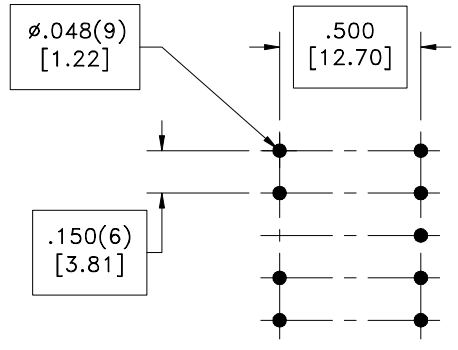
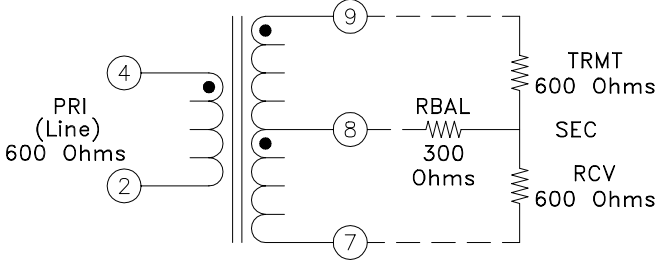
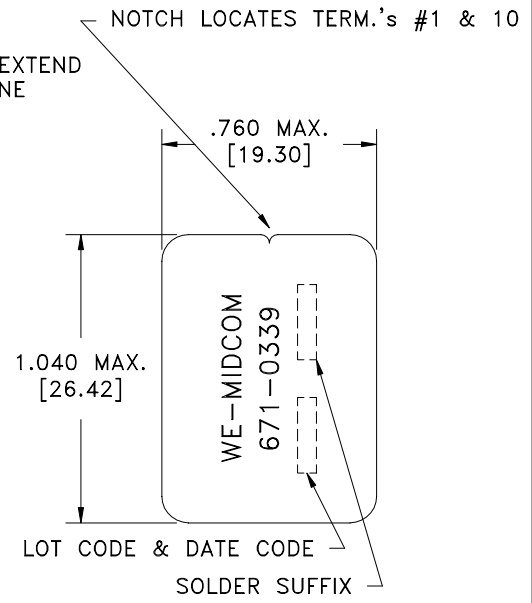


SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
LF1	Sn96%, Ag4%	Yes	Yes

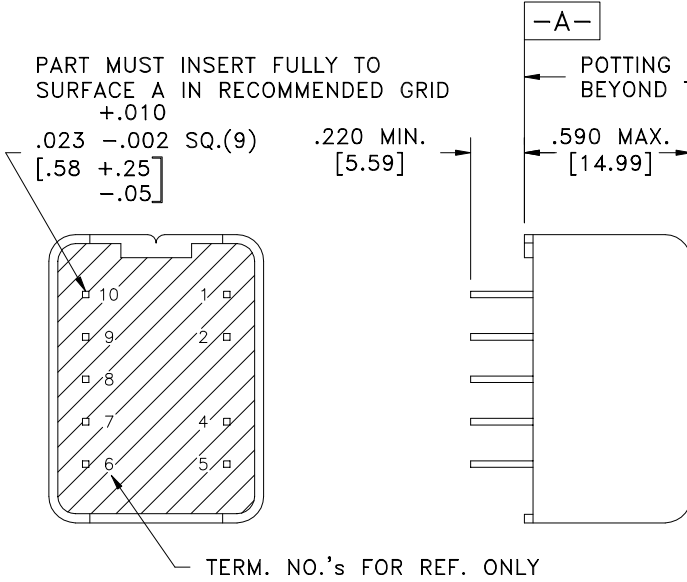

RECOMMENDED P.C. PATTERN, COMPONENT SIDE

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- IMPEDANCE: Designed to reflect 600 ohm on PRI with 2 x 600 ohm on SEC.
- FREQUENCY RESPONSE: 300 - 3400Hz ± 0.5 dB.
- D.C. IN PRI: None.
- INSERTION LOSS: 4.0dB max., TRMT to LINE, 1kHz.
- LONGITUDINAL BALANCE: 60dB, FCC Part 68, 1kHz.
- D.C. RESISTANCE (@20°C): 2-4, 40 ohms $\pm 15\%$.
7-9, 56 ohms $\pm 15\%$.
- TRANSYBRID LOSS: 30dB min., 300 - 3400Hz, Rbal = 300 ohm.
- DIELECTRIC TEST: 1250VAC for 1 second between PRI-SEC.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified:
Tolerances:
Angles: $\pm 1^\circ$
Fractions: $\pm 1/64$
Decimals: $\pm .005$ [.13]

This drawing is dual dimensioned.
Dimensions in brackets are in millimeters.

DRAWING TITLE

TRANSFORMER HYBRID

eiSos p/n: 7500710339 6C

REVISIONS: SEE SHEET 1

Midcom www.midcom-inc.com

DRAWING NO. **671-0339-LF1**

REV. 6C 7/07

SCALE --- SHEET 2 OF 6

DWG # 671-0339-LF1