




# V.90-UL1950 Surface-mount and PCMCIA

## Features

- Low Distortion
- Flat frequency response
- Cost effective
- Supplementary Insulation
- Application drawings available

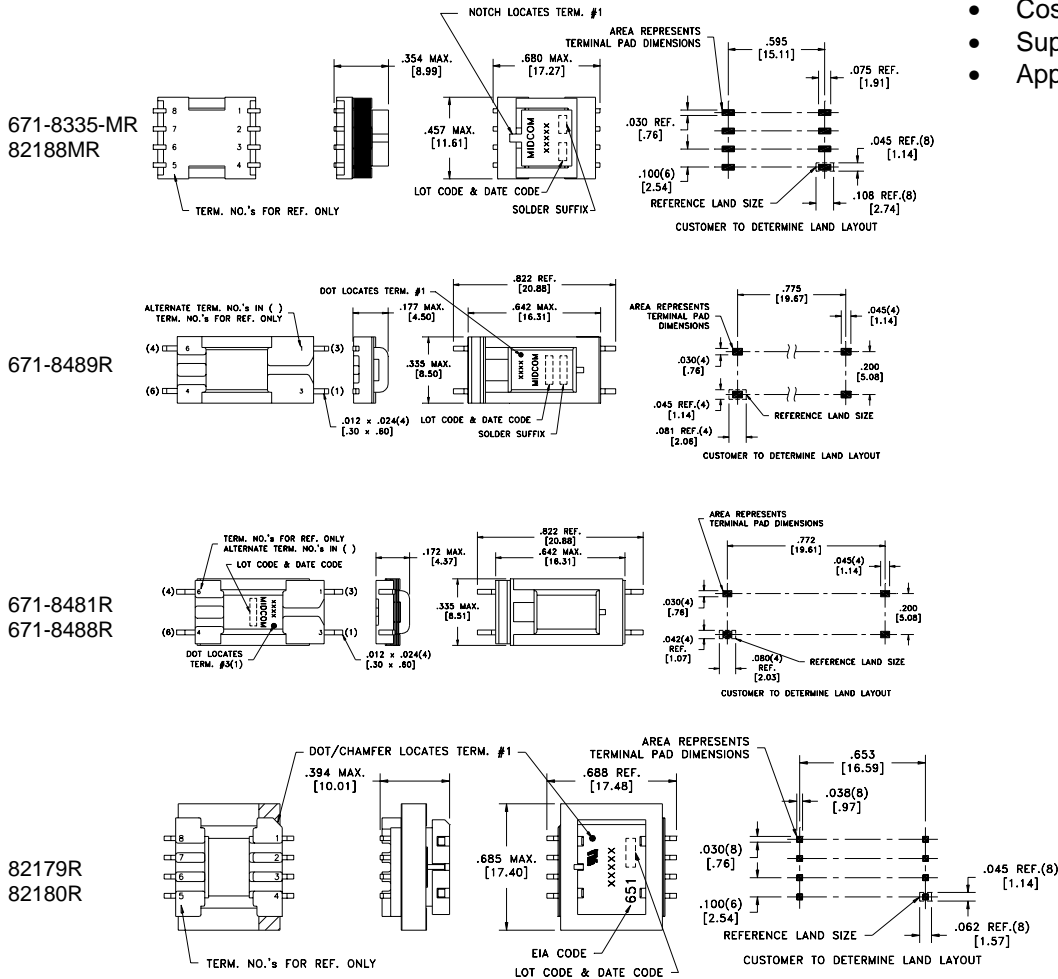

Part Number	THD (dB)	RL (dB)	IL (dB)	Safety Agency	Mechanicals	Pin Bend	Schematic
671-8335-MR	-82	14	3	R250	SMD	-	1
82188MR	-82	14	2.6	S250	SMD	-	1
671-8489R	-82	14	3	S250	SMD	-	2
671-8481R	-82	14	3	S250	PCMCIA	0.096"	2
671-8488R	-82	14	3	S250	PCMCIA	0.084"	2
82179R	-82	20	2.5	S250	SMD	-	1
82180R	-76	20	1	S250	SMD	-	1



Details subject to change. Contact your Midcom sales representative for additional information. Dimensions: in/mm. All tolerances are  $\pm 0.10/0.25$  and electrical specifications are @25°C unless otherwise specified.