
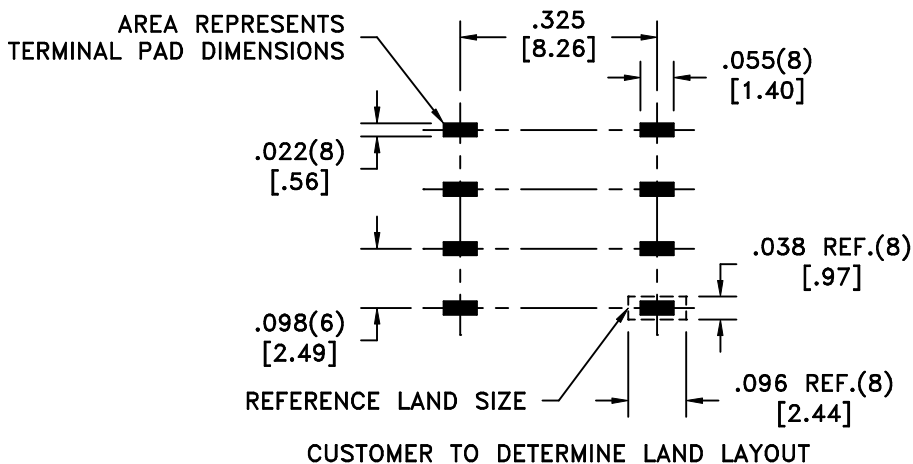



SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	(6B)
	Sn63%, Pb37%	No	No	
LF1	Sn96%, Ag4%	Yes	Yes	

* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

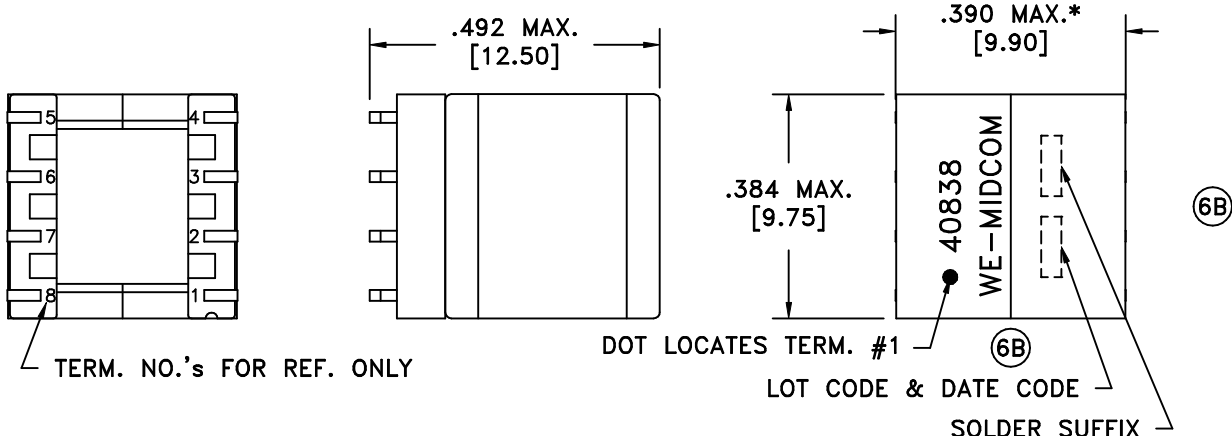

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): 1-8, 15.00 ohms max. } matched within 0.5 ohms.
4-5, 15.00 ohms max. }
- DIELECTRIC RATING: 900VDC for 1 second between 1-4.
2300VDC for 1 second between 1-core; 4-core.
- INDUCTANCE: 32mH ±10%, 20kHz, 100mVAC, 1-5(tie 4+8), Ls.
4mH ref., 20kHz, 100mVAC, 230mADC, 1-5(tie 4+8), Ls.
- TURNS RATIO: (1-8):(4-5) = 1:1, ±1%.

Unless otherwise specified:
Tolerances:
Angles: ±1°
Fractions: ±1/64
Decimals: ±.005[.13]

This drawing is dual dimensioned.
Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n:

REVISIONS: SEE SHEET 1

DRAWING NO. **40838R/-LF1** (6B) REV. 6B/8/05

SCALE --- SHEET 2 OF 5

DWG.# 40838R/-LF1