
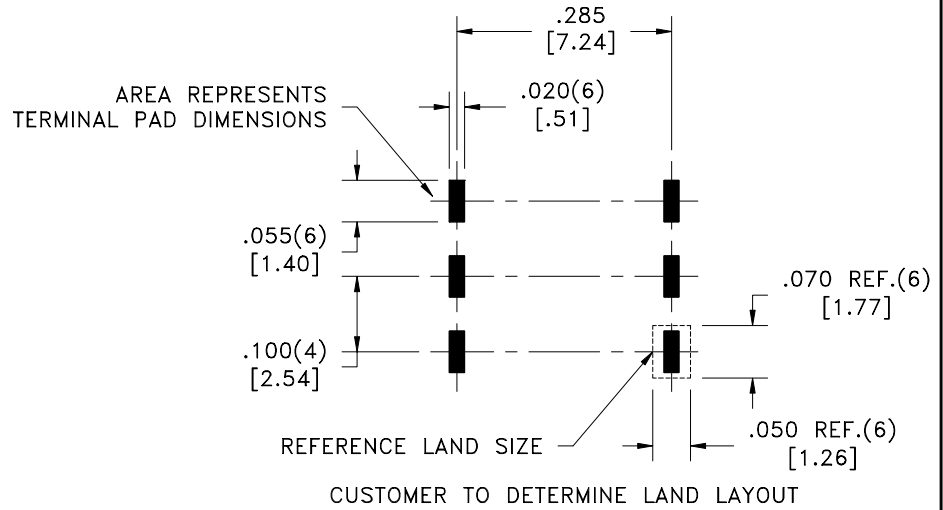

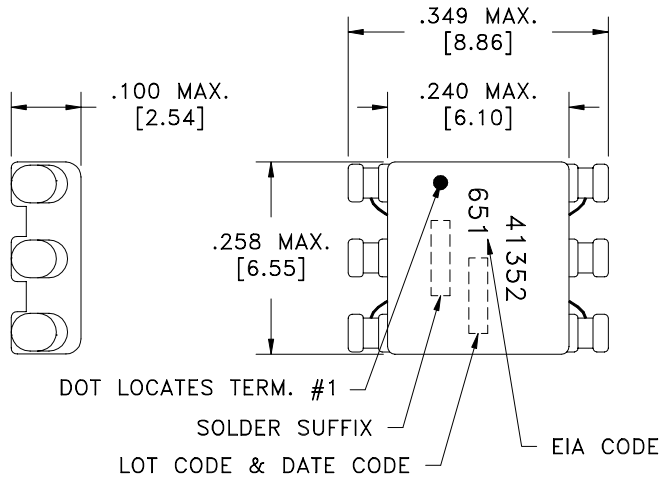


SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
LF2	Sn98%, Cu2%	Yes	Yes

TERM. NO.'s FOR REF. ONLY



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): 1-6, 0.40 ohms max.
3-4, 0.40 ohms max.
- DIELECTRIC RATING: 1500VAC, 1 minute tested by applying 1875VAC for 1 second between 1-3.
- INDUCTANCE: 1.2mH min., 100kHz, 10mVAC, 1-6, Ls.
- TURNS RATIO: (1-6):(3-4) = 1:1, ±1%.
- COMMON MODE ATTENUATION: -25dB typ., 100kHz.
-45dB typ., 2MHz.
-25dB typ., 30MHz.
- CURRENT RATING: 400mADC @40°C.

DETAILS SUBJECT TO CHANGE

Midcom, Inc.
Watertown, SD USA
Toll Free: 800-643-2661
Fax: 605-886-4486

Unless otherwise specified:
Tolerances: Fractions: ±1/64
Angles: ±1° Decimals: ±.005[.13]

DRAWING TITLE
INDUCTOR

Midcom

DRAWING NO. **41352R-LF2** REV. 6A
1/07

REVISIONS: SEE SHEET 1

SCALE --- SHEET 2 OF 5

This drawing is dual dimensioned.
Dimensions in brackets are in millimeters.

DWG # 41352R-LF2