


SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
	Sn63%, Pb37%	No	No
LF2	Sn98%, Cu2%	Yes	Yes

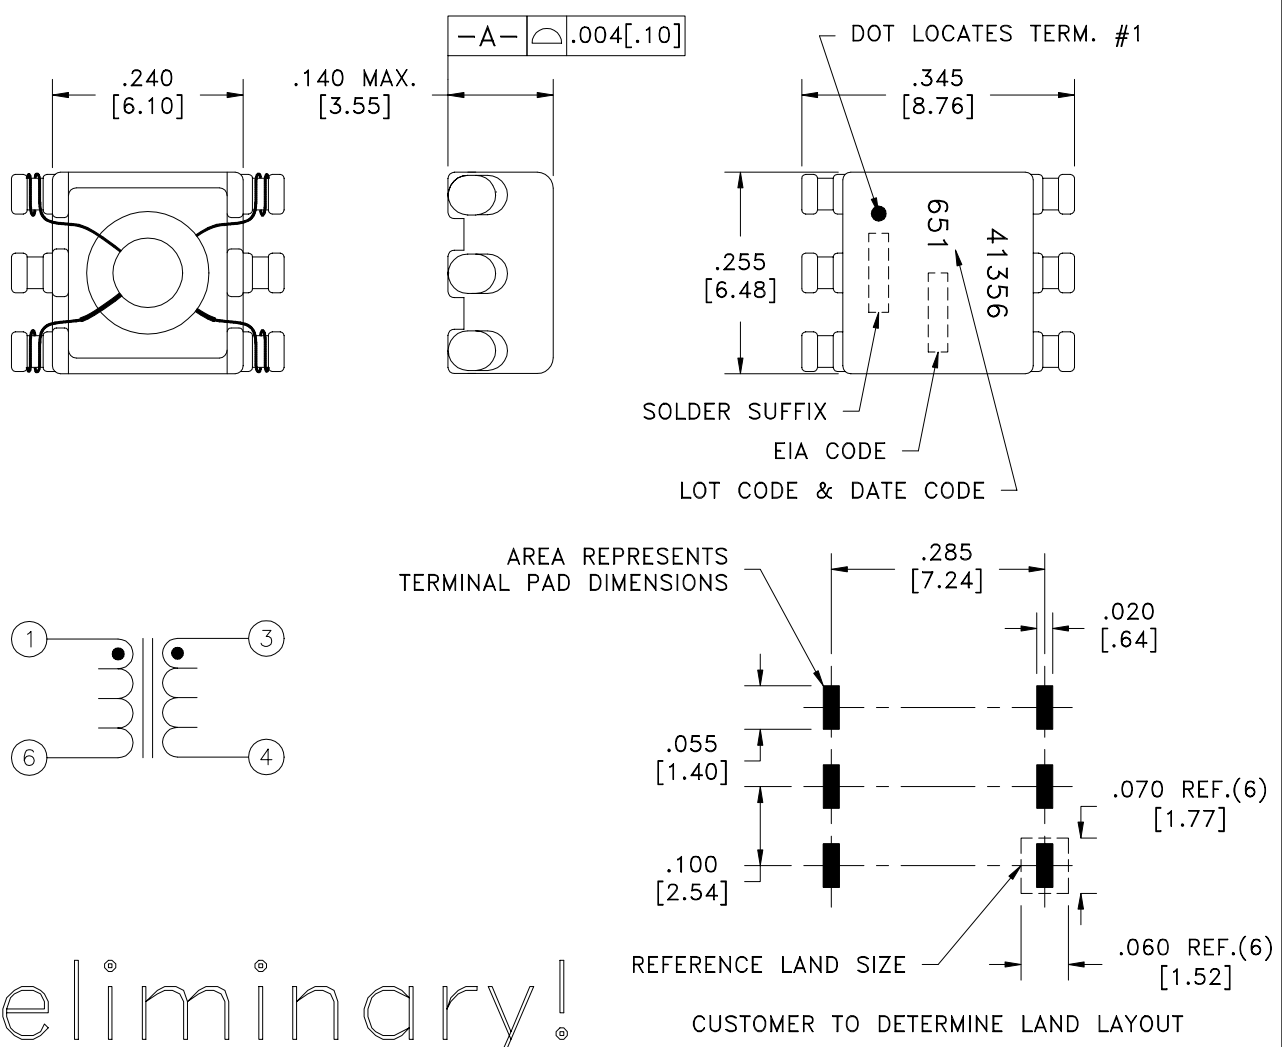

Preliminary!

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): 1-6, TBD ohms max.
3-4, TBD ohms max.
- DIELECTRIC RATING: 1500VAC, 1 minute tested by applying 1875VAC for 1 second between 1-3.
- INDUCTANCE: 2.5mH min., 100kHz, 10mVAC, 1-6, Ls.
- URNS RATIO: (1-6):(3-4) = 1:1, ±1%.
- COMMON MODE ATTENUATION: -25dB typ., 100kHz.
-45dB typ., 2MHz.
-25dB typ., 30MHz.

DETAILS SUBJECT TO CHANGE

Midcom, Inc. Watertown, SD USA Toll Free: 800-643-2661 Fax: 605-886-4486	Unless otherwise specified: Tolerances: Fractions: ±1/64 Angles: ±1° Decimals: ±.005 [.13]				DWG # 41356R/-LF2
	DRAWING TITLE INDUCTOR				
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.		REVISIONS: SEE SHEET 1		SCALE --- SHEET 2 OF 5	