
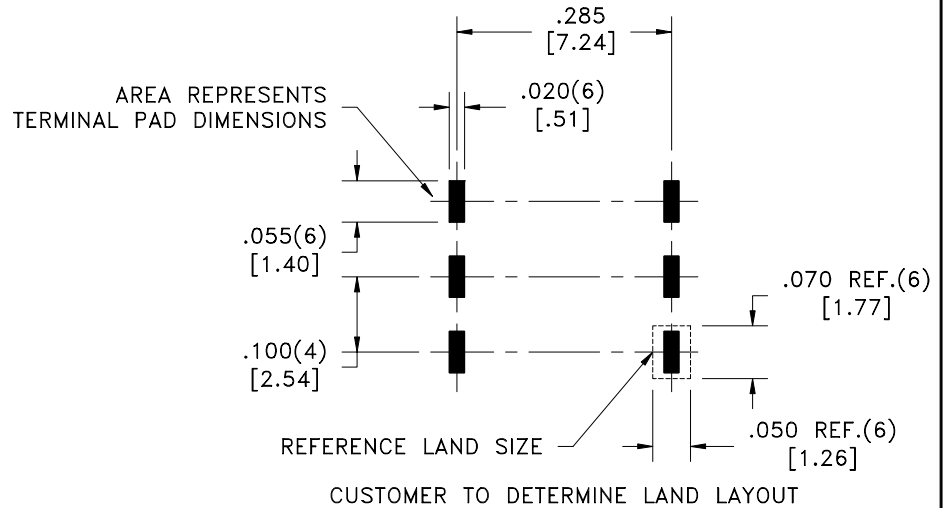

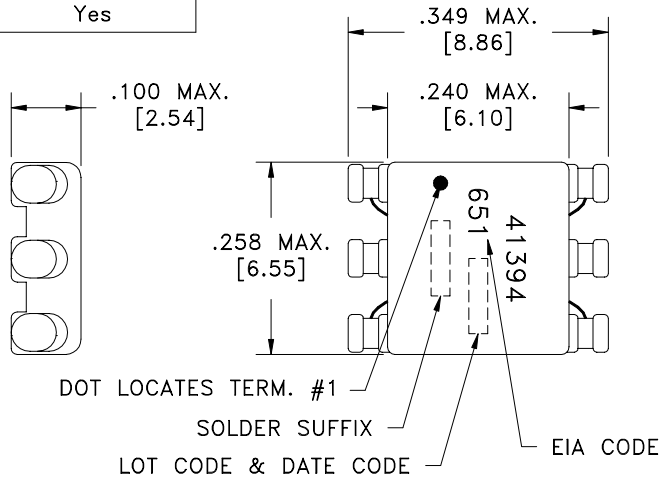



SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
LF2	Sn98%, Cu2%	Yes	Yes

TERM. NO.'s FOR REF. ONLY



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): 0.6 ohms max., each wind.
- DIELECTRIC RATING: 500VDC for 1 second between 1-3.
- INDUCTANCE: 1100uH ±40%, 100kHz, 10mVAC, 1-6, Ls.
- TURNS RATIO: (1-6):(3-4) = 1:1, ±2%.
- CURRENT RATING: 400mADC with 40°C temperature rise.

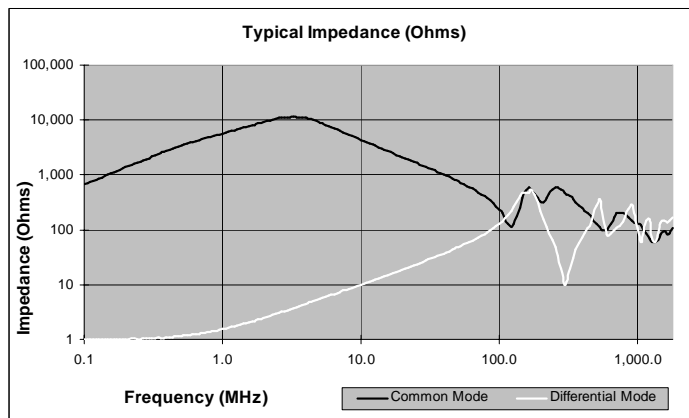

Midcom, Inc.
 Watertown, SD USA
 Toll Free: 800-643-2661
 Fax: 605-886-4486

Unless otherwise specified:
 Tolerances: Fractions: ±1/64
 Angles: ±1° Decimals: ±.005[.13]

DRAWING TITLE
INDUCTOR

REVISIONS: SEE SHEET 1

Midcom

DRAWING NO.
41394R-LF2

REV.
 6A
 1/07

SCALE --- SHEET 2 OF 6

This drawing is dual dimensioned.
 Dimensions in brackets are in millimeters.

DWG # 41394R-LF2