



SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	(6C)
	Sn63%, Pb37%	No	No	
LF1	Sn96%, Ag4%	Yes	No	

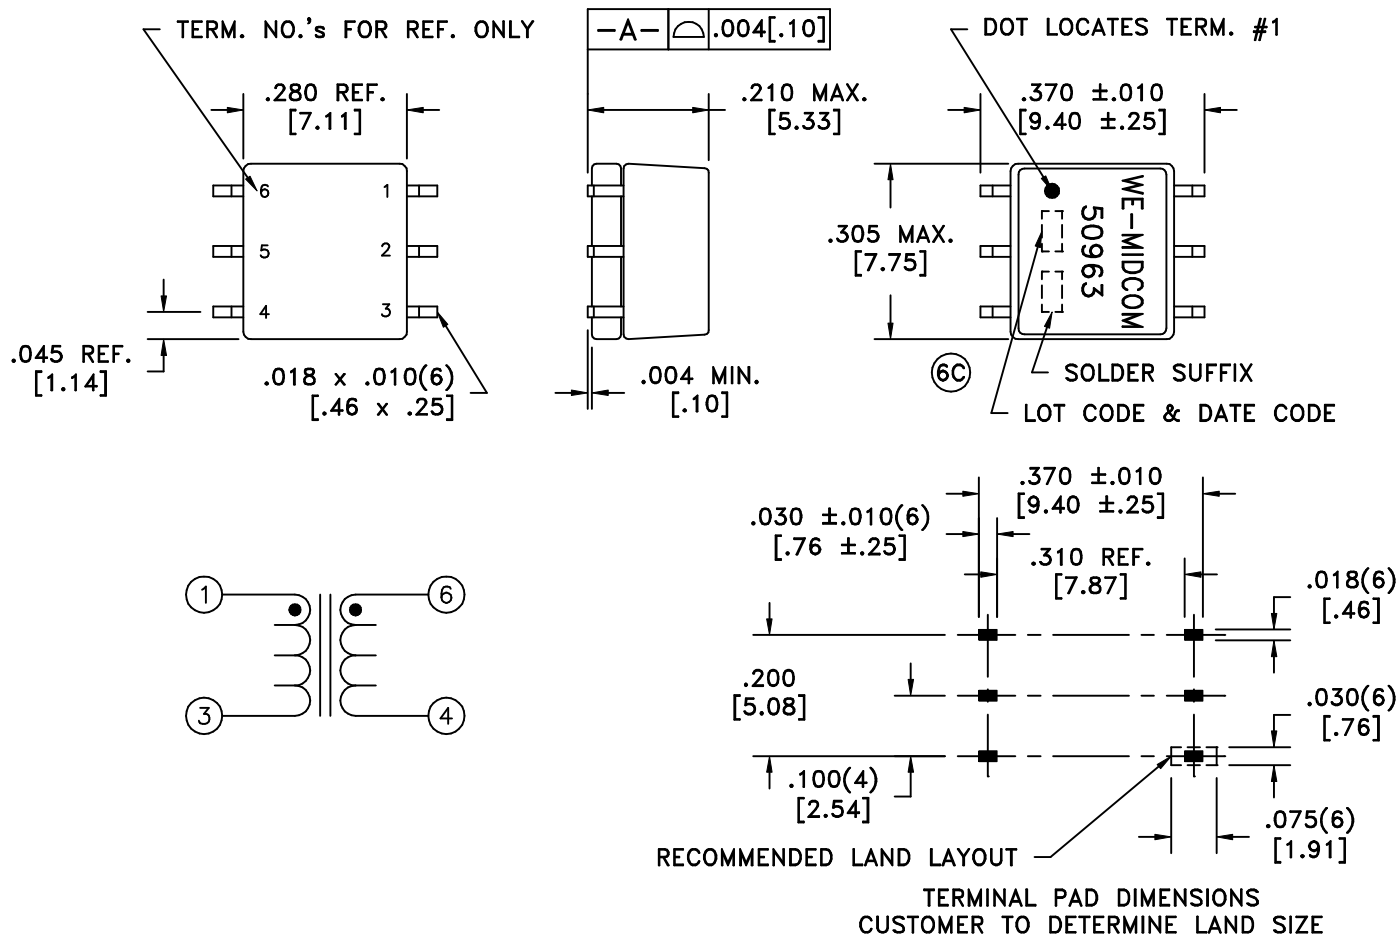

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- (6B) D.C. RESISTANCE (@20°C): 1-3, 0.22 ohms max.
6-4, 0.22 ohms max.
- DIELECTRIC RATING: 1500VAC, 1 minute tested by applying 1875VAC for 1 second between 1-6.
- INDUCTANCE: 40uH min., 100kHz, 100mVAC, 1-3, Ls.
- LEAKAGE INDUCTANCE: 100nH max., 100kHz, 10mAAC, 1-3(tie 6+4), Ls.
- TURNS RATIO: (1-3):(6-4) = 1:1, ±2%.
- INTERWINDING CAPACITANCE: 10pF max., 100kHz, 100mVAC, 1-6, Cs.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified: Tolerances: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13]	DRAWING TITLE <h3 style="text-align: center;">TRANSFORMER</h3> PDSO-G6 eiSos p/n:	 www.midcom-inc.com	DWG.# 50963R/-LF1
	REVISIONS: SEE SHEET 1	DRAWING NO. (6C) REV. 6C <h2 style="text-align: center;">50963R/-LF1</h2> 5/06	
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	SCALE ---	SHEET 2 OF 6	