



# Infinion VDSL Dual Hybrids

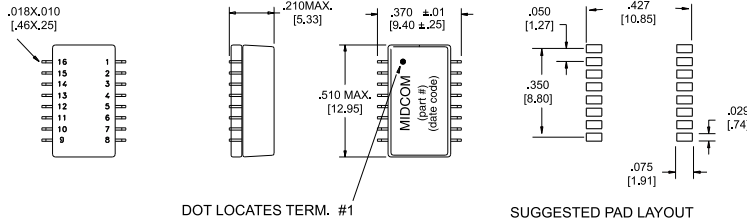

## Features

- Industry standard PDSO-G16 package
- Transfer molded for high reliability
- Dual Hybrid in one package
- Developed with Infineon
- Operating temperature range: -40 to +85C
- Designed for UL1459 and UL1950
- Designed for IEC950

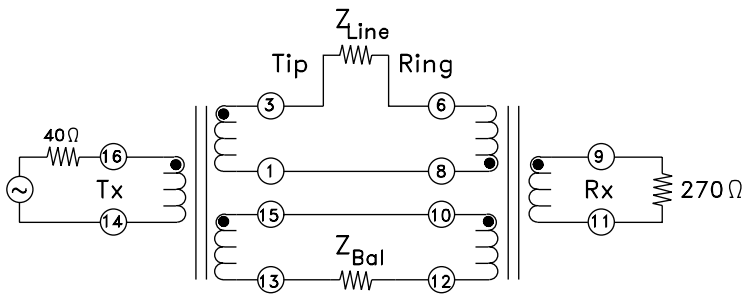

Part	Application Impedance		Transhybrid Attenuation (dB)			DCR (Ohms)
	ZLINE (Ohms)	ZBAL (Ohms)	100KHz	1MHz	10MHz	Each Wind
51015R	100	100	53	59	50	0.35
51474R	120	120	56	56	50	0.35
51403R	135	135	63	61	48	0.30

