


Mini Series Common Mode Chokes

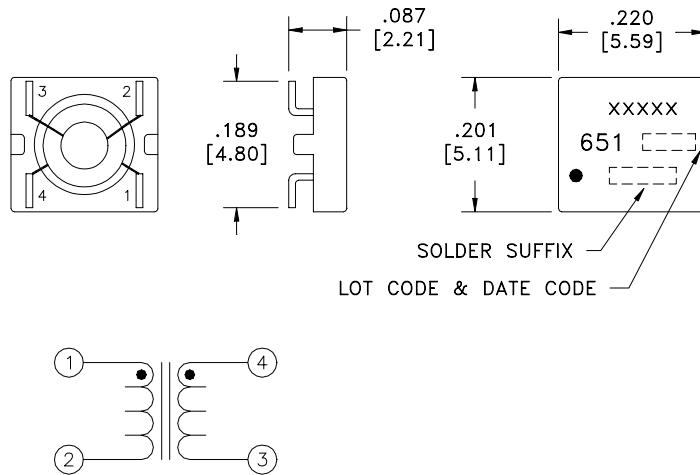

Part Number	Inductance (μH)	DCR Max. (Ω each wind)	Current Rating ¹ (mADC)
41377R	2.2	0.20	700
41376R	42	0.20	700
41375R	178	0.20	700


Note 1: With 40°C typical temperature rise

Features

- Low Profile
- Small size
- Excellent EMI reduction
- Surface mount design
- Good isolation

Applications

- Networking
 - 10 Base-T
 - 10/100 Base-T
 - Gigabit
 - HPLN
 - AUI
 - Fiber to Coax
- Broadband Telecom
 - ADSL
 - HDSL
 - VDSL
- Cable Modem
- T1/E1
- ISDN
- DS3
- DDS
- SONET/SDH
- Low Power Switch Mode

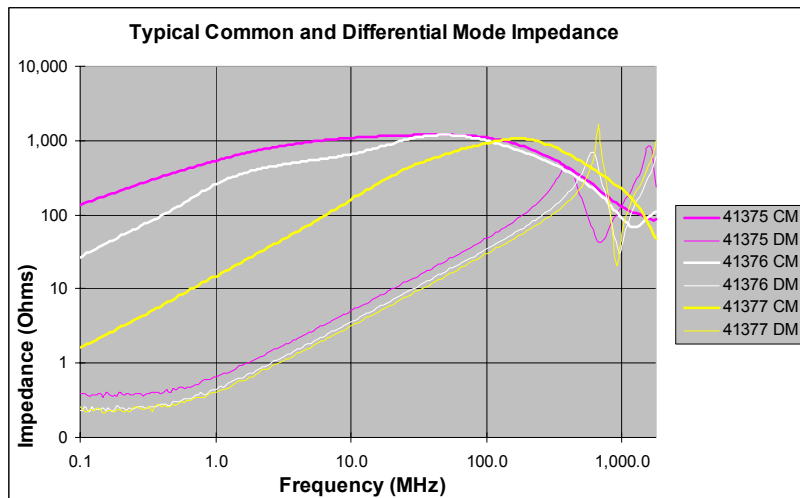

Details subject to change. Contact your Midcom sales representative for additional information. Dimensions: in/mm. All tolerances are ±.010/0.25 and electrical specifications are @25°C unless otherwise specified.