


**Teridian SONET/SDH SMD
Transformer for E4, STM-1,
STS-3 and OC-3 Applications**



DigitalTelecom

Features

- Developed for Teridian's 78P2352
- RoHS compliant
- Small Size
- Separate transmit and receive devices for layout flexibility
- Optional pin-outs
- Operating temperature range of -40°C to +85°C
- 1500VAC dielectric strength

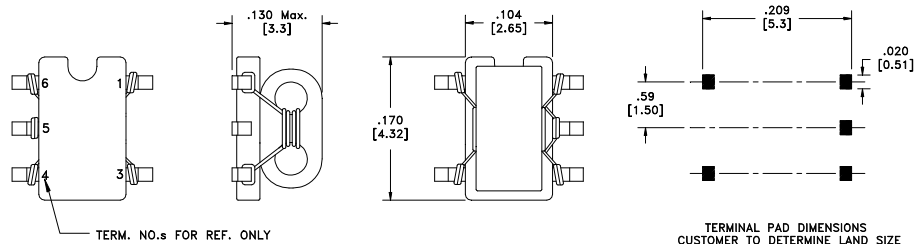

| Part Number | Turns Ratio (PRI1:SEC1) | LPRI @25°C (µH Min) | DCR PRI (ohms Max) | DCR SEC (ohms Max) |
|------------------|-------------------------|---------------------|--------------------|--------------------|
| 000-7400-30R-LF1 | 1:1CT | 36 | 0.2 | 0.2 |

