



SOLDER SUFFIX	CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE	6D
	Sn63%, Pb37%	No	No	
LF1	Sn96%, Ag4%	Yes	Yes	

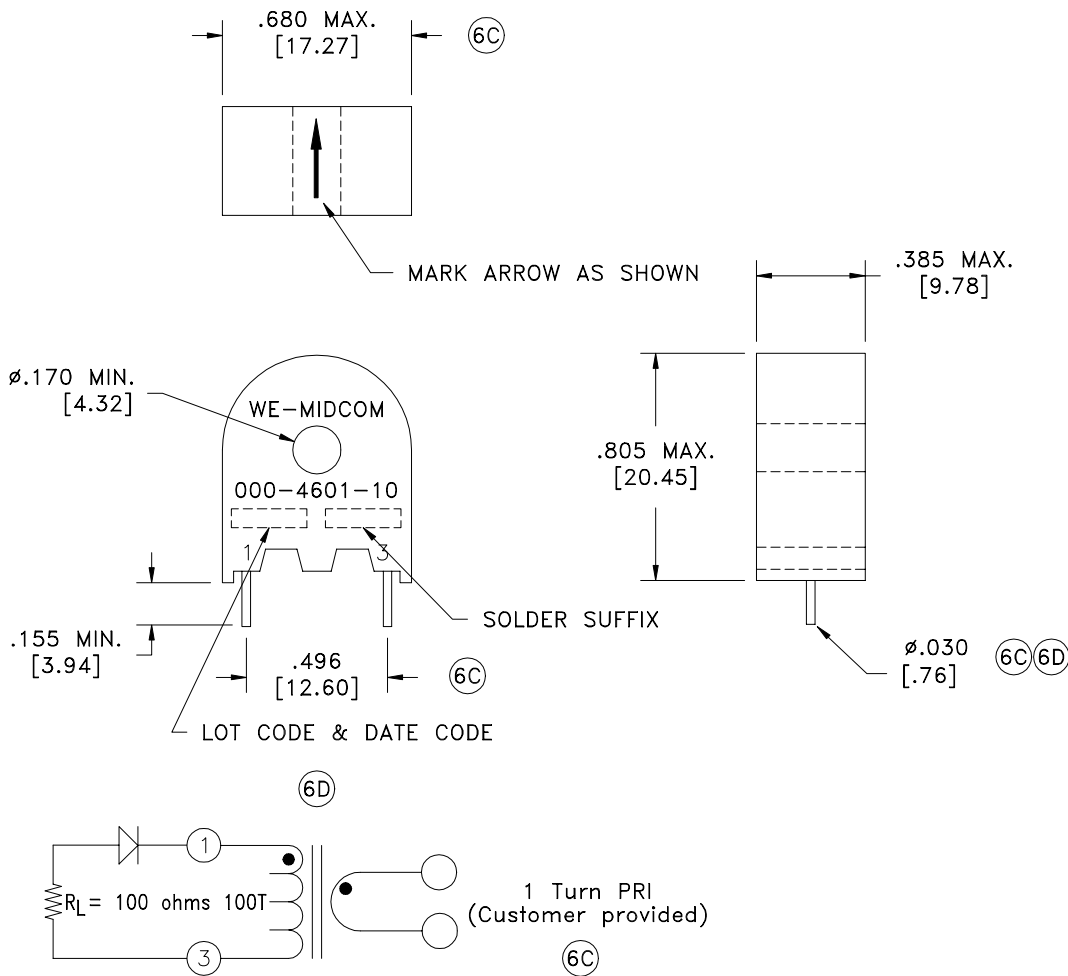

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (20°C): 1-3, 1.40 ohms max.
- DIELECTRIC RATING: 3000VAC, 1 minute tested by applying 3750VAC for 1 second between 1 - brass rod.
- INDUCTANCE: 20mH min., 20kHz, 1.0VAC, 1-3, Ls.
- TURNS RATIO: (1-3):(Test Turn) = 100:1.
- OUTPUT: 1 Volt/Amp @ Rated R_L .
- PEAK SENSE CURRENT: 20 Amps.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified: Tolerances: Angles: $\pm 1^\circ$ Fractions: $\pm 1/64$ Decimals: $\pm .005$ [.13]	DRAWING TITLE <h2 style="text-align: center;">TRANSFORMER</h2>	 www.midcom-inc.com	DRAWING NO. 000-4601-10/-LF1	REV. 6D 12/06	DWG.# 000-4601-10/-LF1
	eiSos p/n:				

This drawing is dual dimensioned.
 Dimensions in brackets are in millimeters.