

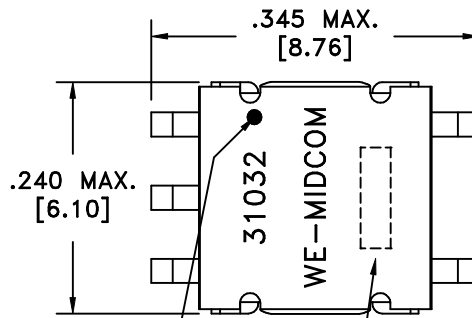



TERM. NO.'s FOR REF. ONLY




DOT LOCATES TERM. #1

LOT CODE & DATE CODE

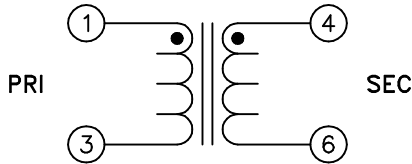

AREA REPRESENTS TERMINAL PAD DIMENSIONS

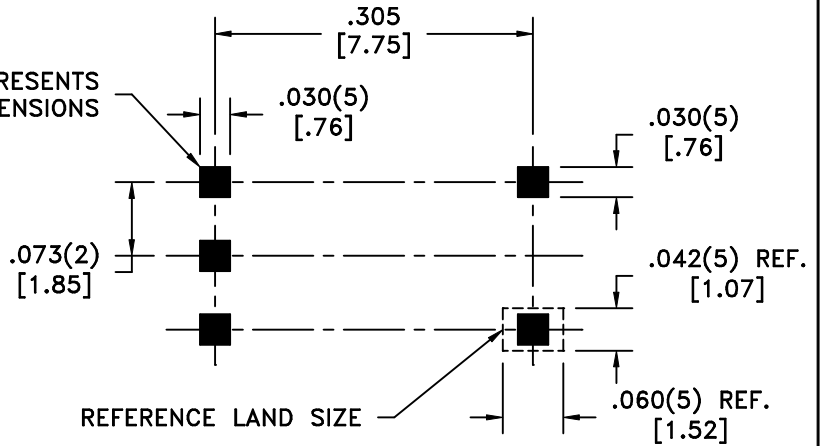

REFERENCE LAND SIZE

CUSTOMER TO DETERMINE LAND LAYOUT

6C

**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

D.C. RESISTANCE (@20°C): 1-3, 0.90 ohms max.  
4-6, 12.25 ohms max.

6B DIELECTRIC RATING: 550VDC for 1 minute between 1-4.

6D INDUCTANCE: 3.7uH ±20%, 10kHz, 10mVAC, 3-1, Ls.

URNS RATIO: (4-6):(1-3) = 12.04:1, ±1%.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified:  
Tolerances:  
Angles: ±1°  
Fractions: ±1/64  
Decimals: ±.005[.13]

This drawing is dual dimensioned.  
Dimensions in brackets are in millimeters.

DRAWING TITLE

**TRANSFORMER**

eiSos p/n:

REVISIONS: SEE SHEET 1



DRAWING NO.

**31032R**

REV.

6E  
8/06

SCALE ---

SHEET 2 OF 5

DWG.# 31032R