

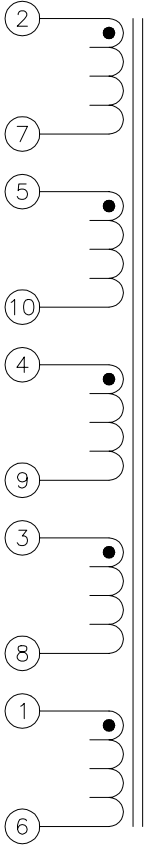
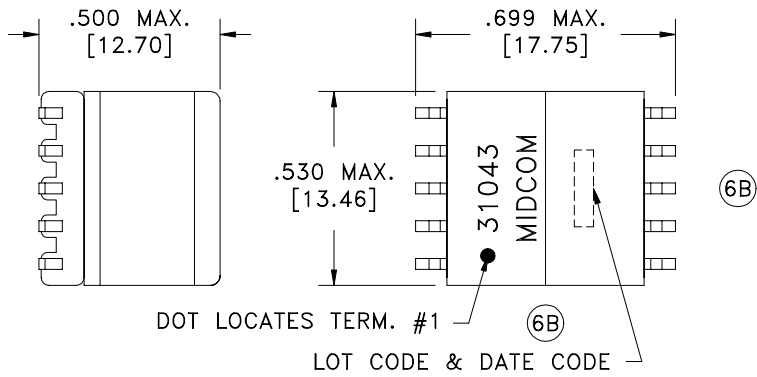


TERM. NO.'s FOR REF. ONLY



AREA REPRESENTS TERMINAL PAD DIMENSIONS

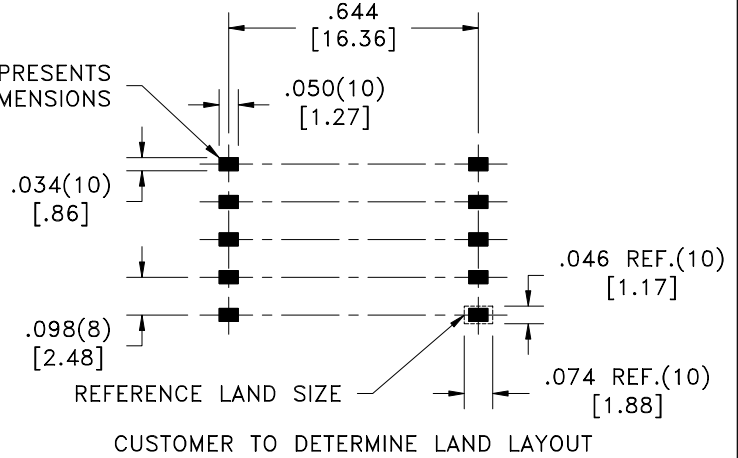

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): 0.200 ohms max. for any winding.
- DIELECTRIC RATING: 500VAC for 1 second between all windings.
- INDUCTANCE: 4.7uH ±15%, 10kHz, 10mVAC, 2-7, Ls.
- URNS RATIO:
 - (2-7):(5-10) = 1:1, ±1%.
 - (2-7):(4-9) = 1:1, ±1%.
 - (2-7):(3-8) = 1:1, ±1%.
 - (2-7):(1-6) = 1:1, ±1%.

DETAILS SUBJECT TO CHANGE

Midcom, Inc.
Watertown, SD USA
Toll Free: 800-643-2661
Fax: 605-886-4486

Unless otherwise specified:
Tolerances: Fractions: ±1/64
Angles: ±1° Decimals: ±.005 [.13]

DRAWING TITLE
TRANSFORMER

Midcom

DRAWING NO. **31043R** REV. 6B 6/06

This drawing is dual dimensioned.
Dimensions in brackets are in millimeters.

REVISIONS: SEE SHEET 1

SCALE ---

SHEET 2 OF 5

DWG.# 31043R