

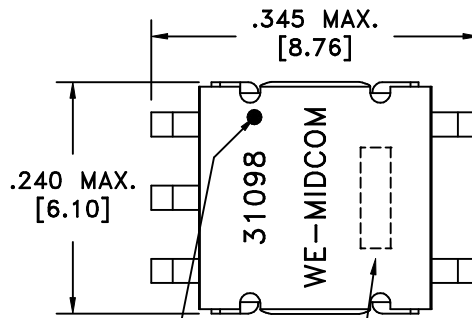



TERM. NO.'s FOR REF. ONLY




DOT LOCATES TERM. #1

LOT CODE & DATE CODE



AREA REPRESENTS TERMINAL PAD DIMENSIONS

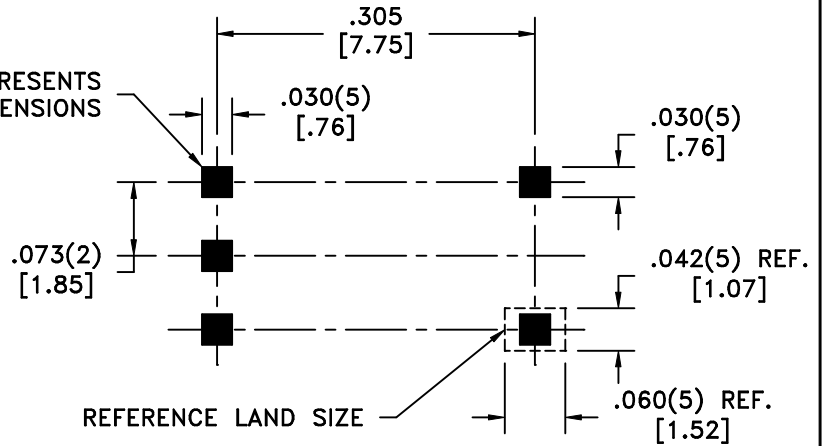

REFERENCE LAND SIZE

CUSTOMER TO DETERMINE LAND LAYOUT

6B

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

D.C. RESISTANCE (@20°C): 6-4, 1.23 ohms max.
 1-2, 1.40 ohms max.
 2-3, 1.40 ohms max.

DIELECTRIC RATING: 1250VDC, 1 minute tested by applying 1500VDC for 1 second between WINDINGS.

INDUCTANCE: 17.20uH ±20%, 10kHz, 100mVAC, 6-4, Ls.

URNS RATIO: (1-2):(6-4) = 1:1, ±1%.
 (2-3):(6-4) = 1:1, ±1%.

DETAILS SUBJECT TO CHANGE

Midcom, Inc. Watertown, SD USA Toll Free: 800-643-2661 Fax: 605-886-4486	Unless otherwise specified: Tolerances: Fractions: ±1/64 Angles: ±1° Decimals: ±.005 [0.13]			DWG.# 31098R
	DRAWING TITLE <h2 style="text-align: center;">TRANSFORMER</h2>	DRAWING NO. <h2 style="text-align: center;">31098R</h2>	REV. 6C 8/06	
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	REVISIONS: SEE SHEET 1	SCALE ---	SHEET 2 OF 5	