
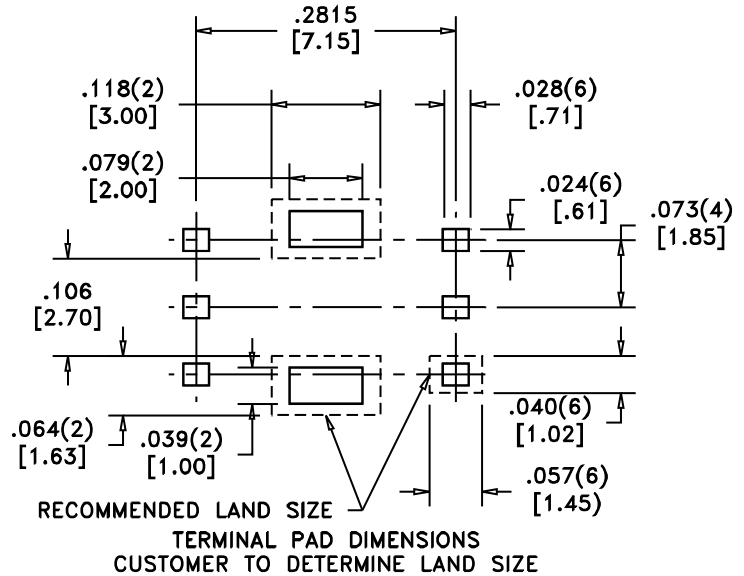
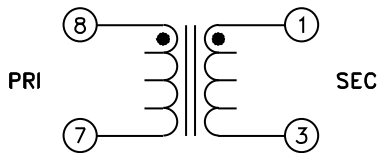
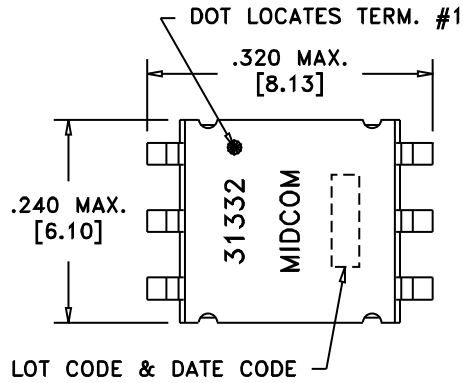



TERM. NO.'s FOR REF. ONLY



**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

- D.C. RESISTANCE (@20°C): 1-3, 7.70 ohms max.
- DIELECTRIC RATING: 500VAC, 1 minute tested by applying 625VAC for 1 second between 8-1.
- INDUCTANCE: 3.0mH min., 100kHz, 100mVAC, 1-3, Ls.
- TURNS RATIO: (1-3):(8-7) = 125:1, ±1%.
- PRIMARY RATING: 6.0Arms max.
- 6C OPERATING TEMPERATURE RANGE: -40°C to +85°C.

DETAILS SUBJECT TO CHANGE

**Midcom, Inc.**

Watertown, SD USA  
Toll Free: 800-643-2661  
Fax: 605-886-4486

This drawing is dual dimensioned.  
Dimensions in brackets are in millimeters.

Unless otherwise specified:  
Tolerances: Fractions: ±1/64  
Angles: ±1° Decimals: ±.005(.127mm)

DRAWING TITLE

**TRANSFORMER**

REVISIONS: SEE SHEET 1

**Midcom**

DRAWING NO.

**31332R**

SCALE ---

REV.

6C  
8/01

SHEET 2 OF 5

DWG.# 31332R