
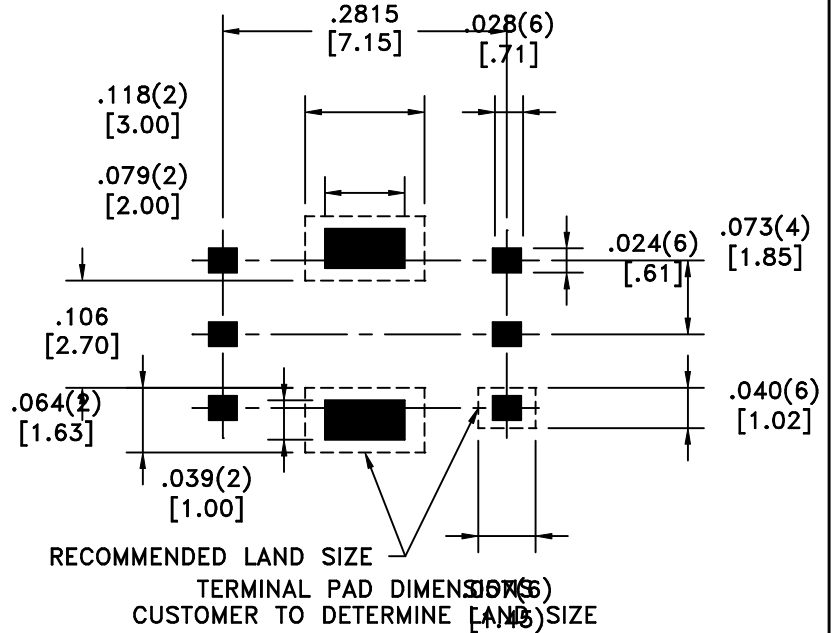
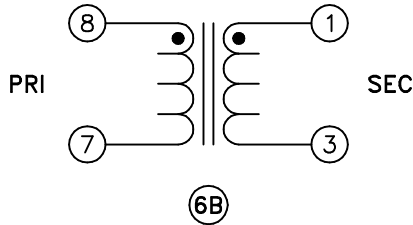
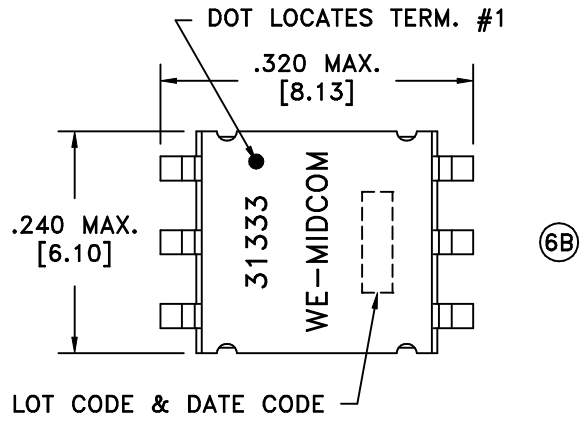



TERM. NO.'s FOR REF. ONLY



RECOMMENDED LAND SIZE
 TERMINAL PAD DIMENSIONS
 CUSTOMER TO DETERMINE LAND SIZE

6B ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): 1-3, 5.87 ohms max.
- DIELECTRIC RATING: 500VAC, 1 minute tested by applying 625VAC for 1 second between 8-1.
- INDUCTANCE: 2.0mH min., 100kHz, 100mVAC, 1-3, Ls.
- TURNS RATIO: (1-3):(8-7) = 100:1, ±1%.
- PRIMARY RATING: 6.0Arms max.

6D OPERATING TEMPERATURE RANGE: -40°C to +85°C.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified:
 Tolerances:
 Angles: ±1°
 Fractions: ±1/64
 Decimals: ±.005[.13]

This drawing is dual dimensioned.
 Dimensions in brackets are in millimeters.

DRAWING TITLE

TRANSFORMER

eiSos p/n:

REVISIONS: SEE SHEET 1

Midcom WE
 www.midcom-inc.com

DRAWING NO.

31333R

REV.

6D
 7/08

SCALE ---

SHEET 2 OF 5

DWG.# 31333R