
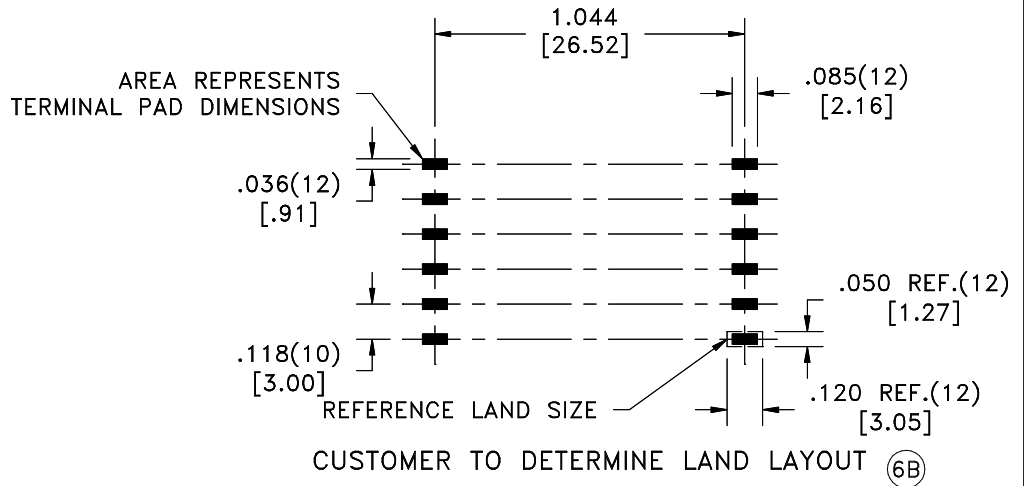
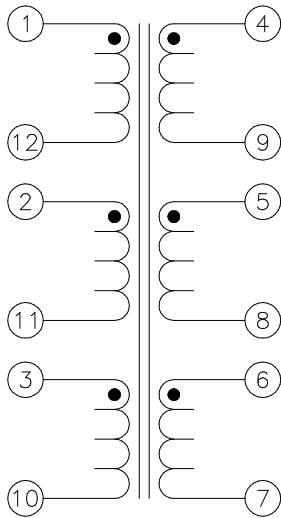
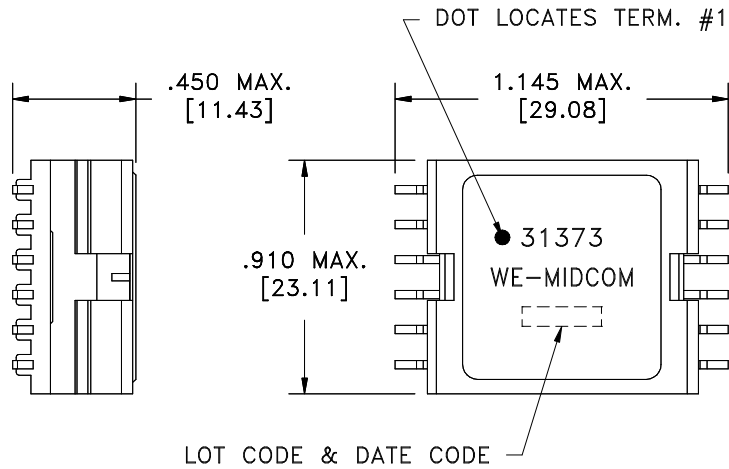



TERM. NO.'s FOR REF. ONLY



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): All windings, 0.06 ohms max.
- DIELECTRIC RATING: 500VAC, 1 minute tested by applying 625VAC for 1 second between all windings.
- INDUCTANCE: 57.6uH ±20%, 100kHz, 100mVAC, Ls.
- URNS RATIO:
 - (1-12):(3-10) = 1:1, ±1%.
 - (1-12):(4-9) = 1:1, ±1%.
 - (1-12):(2-11) = 1:1, ±1%.
 - (1-12):(5-8) = 1:1, ±1%.
 - (1-12):(6-7) = 1:1, ±1%.

DETAILS SUBJECT TO CHANGE

Unless otherwise specified: Tolerances: Angles: ±1° Fractions: ±1/64 Decimals: ±.005[.13]	DRAWING TITLE <h2 style="text-align: center;">TRANSFORMER</h2>		 www.midcom-inc.com		DWG.# 31373R
	eiSos p/n:		DRAWING NO. <h2 style="text-align: center;">31373R</h2>	REV. 6B 11/08	
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	REVISIONS: SEE SHEET 1		SCALE ---	SHEET 2 OF 5	