
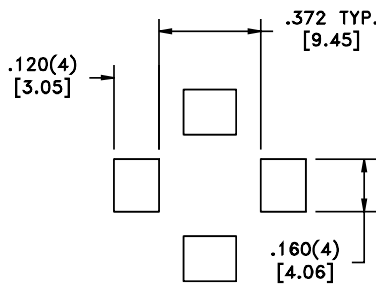



Common Mode Chokes

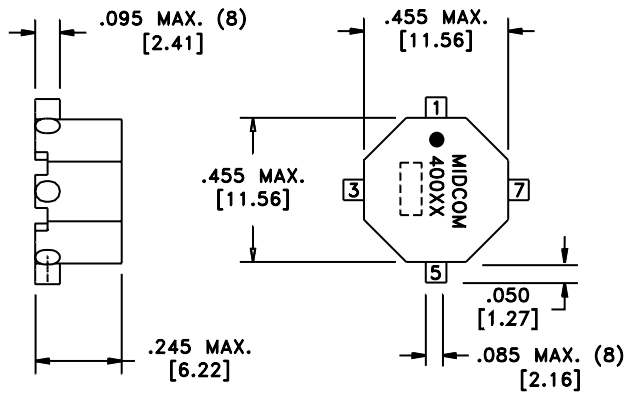

MOUNTING PATTERN

Features

- Various inductance and current ratings
- Small footprint

Applications

- Designed for DC/DC converters
- Can be used for common mode rejection in any DC/DC supply

Environmental Specifications

- Operating temperature range: -40°C to +85°C
- Storage temperature range: -50°C to +125°C

Packaging

- Parts are packaged 600 pieces per 13" reel

Part Number	Inductance uH +/-25%	Rated Current A	DCR (ohms max)	Dielectric (1,2 - 3,4)Vrms
40332R	1170	1.22	0.200	500
40352R	880	1.65	0.100	500

NOTES

1. Open circuit inductance test at 100KHz, 250mV. Electrical specifications at 20°C
2. DCR is for each winding.
3. Inductance is for each winding.
4. Rated current is for each winding.